

FRUIT & VEGETABLE CRATES

BOX3000 e BOX3000M



6416 BOX3000



6416 BOX3000 M
with closing lever



Features

Made of polypropylene (PP) with additives to resist ultraviolet rays, complying with European standards UNI-EN 13117

Dedicated to the fruit and vegetable sector, they are green and are available in four formats

Specially designed for food, are easily washable and do not undergo tare movements

They are well ventilated to facilitate fruit and vegetable transpiration and are equipped with removable interlocking label holders

They are suitable for refrigerated shelves

Operating temperature: the boxes are suitable for use at temperatures between -10 and +50 degrees centigrade

Advantages


- Optimal transport packaging that guarantees freshness and quality of goods throughout the production chain, particularly for fruit and vegetables, from the producer to large-scale distribution
- Significant reduction of damage to goods during transport and storage
- Easy and safe foldable stacking
- Optimum protection during transport guaranteed by stability and rounded internal corners
- Folding side panels reduce space and empty handling costs (4 closed crates occupy the space of 1 open - ref. Model F6416)
- Reusable packaging system
- Completely recyclable in every part, CPR System crates eliminate any packaging waste which would impact the environment
- The BOX3000M case is equipped with a lever for a quicker and safer manual closure of the banks

Dimensions and specifications*

TYPE AND MODELS	DIMENSIONS Length x Width x Height in mm					WEIGHT Tare (g)	VOLUME Internal Volume in Lt	CARRYING CAPACITY		LOGISTICS		
	External Size	Internal usable space	Stack height		Maximum weight that can be contained in kg			Max top load in kg	Composition loading units No. of Crates	Weight per LU in kg ***	Total load weight in kg ****	
			useable internal	external								
64xx	6421	600x400x229	570x370x212	205	220	1.980	44,9	20	500	4 rowsx30x2=240	525	17.325
	6416**	600x400x180	570x370x165	156	171	1.830	35	15	500	4 rowsx30x2=240	489	16.137
	6410	600x400x119	570x370x104	95	110	1.470	22	10	500	4 rowsx30x2=240	403	13.299
34xx	3416	300x400x180	270x370x165	156	171	1.130	16.5	8	500	8 rowsx30x2=480	597	19.701

note: (*) +/- tolerance possible (**) the 6416M case with lever has the same characteristics (***) LU= loading units - including 2 pallets under crates weighing 25 kg (****) for weights of 33 LU

Instructions for use

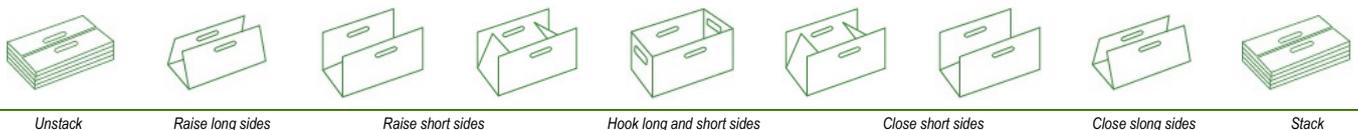

Values are indicative - CPR reserves the right to change the above information without notice.

www.cprsystem.it - info@cprsystem.it

CPR System s.c.
Legal Headquarters Via Verdi 8 40051 Malalbergo (BO)
Operations office Via Nazionale 3 44028 Gallo (FE)
tel. 0532 823912 fax. 0532 823938